




TIL-2 Inox Stainless Steel

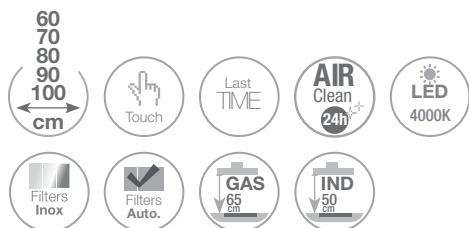

Modelos / Models

Motor Interior / Interior Motor Inox

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
60	V.830	Ø120-150	A	010660
70	V.830	Ø120-150	A	010661
80	V.830	Ø120-150	A	010662
90	V.830	Ø120-150	A	010663
100	V.830	Ø120-150	A	010664

Opcionales / Options

Filtro inoxidable. Precio unitario
Stainless steel filter. Unit price

Kits de recirculación. Ver página 210
Activated carbon filters kit. See page 210

Incorporación de serie aro reductor de Ø150 a Ø120 mm.
Standard incorporation of reducing ring from Ø150 to Ø120 mm.

Opción de cambio a LED de luz cálida de 3000K. Suministrado con la campana.
LED change to warm light LED 3000K. Available only at the factory.

Mando a distancia electrónico. Suministrado con la campana.*
Electronic remote control (only for Inox model). Available only at the factory.*





Opcional* Option*

Ref. 620062200639

Mando a distancia electrónico.
Electronic remote control.

Esquemas medidas / Technical Drawings

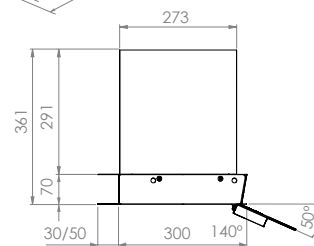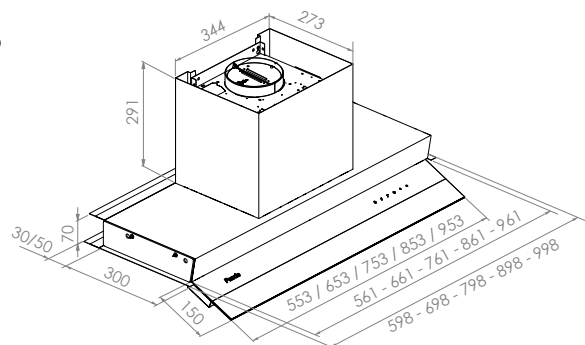

Notas / Notes

AirClean

Sistema automático de funcionamiento del motor 10 min. cada hora durante 24 horas.
Automatic working motor system for 10 minutes every hour during 24 hours.